#### **DIGITAL CREASING / PERFORATING**



## AccuCreaser Air





High volume creasing and perforation


Air-feed operation with built-in register guide

Great companion for the COUNT KF-200

Rotary perf/score, including micro perf

User-friendly touch screen control

Auto setups of all the following:





Our top-of-the-line air-feed creasing and perforating solution – fast, consistent and accurate.



Bottom Air/Suction Feed with Register Guide



Rotary Perforating Standard



RAC Compression Crease Assembly

The COUNT<sup>™</sup> AccuCreaser Air provides fast, consistent quality creasing and perfing, with a variety of features that make it top of its class. Get super accurate rotary-actuated impact creasing with rotary perf/score capabilities, including micro-perf (up to four at a time), and automated distance recognition to support auto set-ups for a variety of creases, even perfect bind set-up. The AccuCreaser Air utilizes a bottom air paper feed with a built-in register guide to ensure accuracy with every sheet.



# AccuCreaser Air

A quality air-feed solution for high volume creasing and perforating with maximum speed and accuracy.

### **Features**

- Provides modes for creasing, perforating or feeding.
- Bottom air feed with sheet spacing control.
- Rotary actuated impact creasing ensures maximum crease accuracy.
- Automated Distance Recognition allows auto setups for your most common creases and corresponding folds, including perfect bind.
- Perform up to 4 perfs at a time (including micro perf).
- Includes a sheet counter (for both batch and total sheet count).
- Add the optional inline transport to feed directly into the COUNT<sup>™</sup> CountCoat or other UV coaters.
- · Includes standard and extra wide crease dies.
- User-friendly touch screen for easy set up and control of the machine.


#### **Specifications**

Model:	AccuCreaser Air
Model No.:	ACTREG
Paper Feed:	Air
Weight:	300 lbs (136 kg)
Max Compression Crease: (sheets per hour)	5,500
Max Rotary Perf/Score Speed: (sheets per hour)	12,000
Paper Weight Range: (gsm)	60 - 350
Dimensions:	56.0 L x 30.0 W x 44.0 H in (142.3 x 76.2 x 111.8 cm)
Max Sheet Size:	18 x 24 in (45.7 x 50.8 cm)
Min Sheet Size:	4.5 x 6 in (15.2 x 15.2 cm)
Electrical:	115 V, 60 Hz, 20 A or 230 V, 50 Hz, 20 A
Made in:	U.S.A.



#### Automatic Set-Up for Many Common Folds

Half Tri-Fold Z-Fold Letter Fold Roll Fold Gate Fold Double Gate Fold Double Parallel Fold Perfect Bind - No Hinge Perfect Bind - Single Hinge

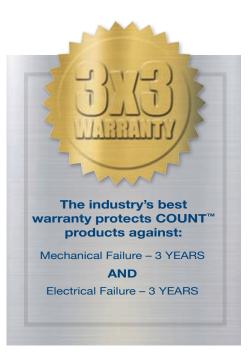

COUNT print finishing equipment is manufactured by Martin Yale Industries, LLC. 251 Wedcor Avenue, Wabash, Indiana 46992 260-563-0621 | Fax: 260-563-4575 www.martinyale.com



COUNT is a trademark of Martin Yale Industries, LLC. Copyright © 2016. All rights reserved. 10/2016